
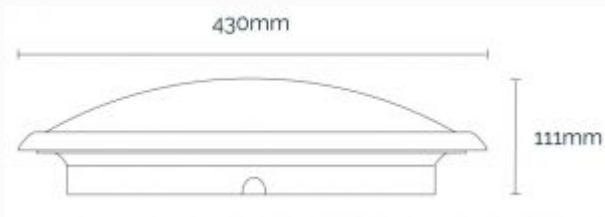










Product Information	Data
Category	Bulkheads
Name	Horizon LED Emergency Motion Sensor
Codex Code	COBH/HO1340/EMMS
Legacy Code	CO05-NF-PH-10-DIMMABLE-MS-EML
Image	
Features & Benefits	<p>Circular LED decorative bulkhead with plug in lamp suitable for internal or external use</p> <p>Simple installation, wall or ceiling mount</p> <p>4000K colour temperature</p> <p>13W exceeds performance of 16-38W TC-DD</p> <p>Instant, smooth, even light output</p> <p>LED lifespan L70 50,000 hours</p>
At a glance	
IP Rating	IP20
Colour/ Finish	White
Mounting Method	Wall/ Ceiling
Warranty (Years)	5


Product Information	Data
TECHNICAL DATA	
Wattage (W)	13
Light Source	SMD 2835
Number of LED's	132
Operating Lifespan (Hours)	50,000
Colour Temperature CCT (K)	4000
CRI	>80
Luminous Flux (Lm)	1300
Lumens/Watt (Lm/W)	130
Input Voltage/ Frequency	AC220~240V 50/60Hz
Class Protection	Class 2
Operating Temperature Range (degrees C)	minus 20 plus 40
Dimensions	
Detail Dimensions	W/Diam 430 x Depth 111mm
Motion Sensor	YES
Motion Sensor Technical Data	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;">  <p>Sensor Distance MAX.8m</p> </div> <div style="text-align: center;">  <p>Mounting Height MAX.6m</p> </div> <div style="text-align: center;">  <p>Lux Sensor Optional</p> </div> <div style="text-align: center;">  <p>Hold Time Optional</p> </div> <div style="text-align: center;">  <p>Microwave 5.8GHz</p> </div> <div style="text-align: center;">  <p>2 or 3 step Dimmable Control</p> </div> </div>
Corridor Function	YES
3 Step Dimming	YES
Lux Sensor	YES
Photocell Advance	YES
Adjustable Controls	YES
Emergency	YES

Product Information	Data
Replaceable Plug In Light Source	YES
Replaceable Emergency Pack	YES
Battery Warranty (years)	1
Other Options	Please contact us for further CCT, casing trim, rim and base colour options.
<b>MOTION SENSOR TECHNICAL INFORMATION</b>	
Micro-Wave Frequency (GHz)	8.83 plus/minus 75
Detection Distance	8 m max
Mounting Height (m)	3m to 6m
Detection Area	R(5 to 8m), H(3m)
Detection Angle	150 degrees
Daylight Threshold	5LUX, 15LUX, 50LUX
Sensitivity Settings	10%, 50%, 75%, 100%
Hold Time	10 secs/ 90 secs/ 3 mins/ 10 mins
Standby Dimming Level	20%/ 35%
3 Steps Dimming Standby Period	0 secs/ 30 secs/ 10 mins/ Disable

Product Information

Data

2 & 3 Step Dimmable Controls Explained

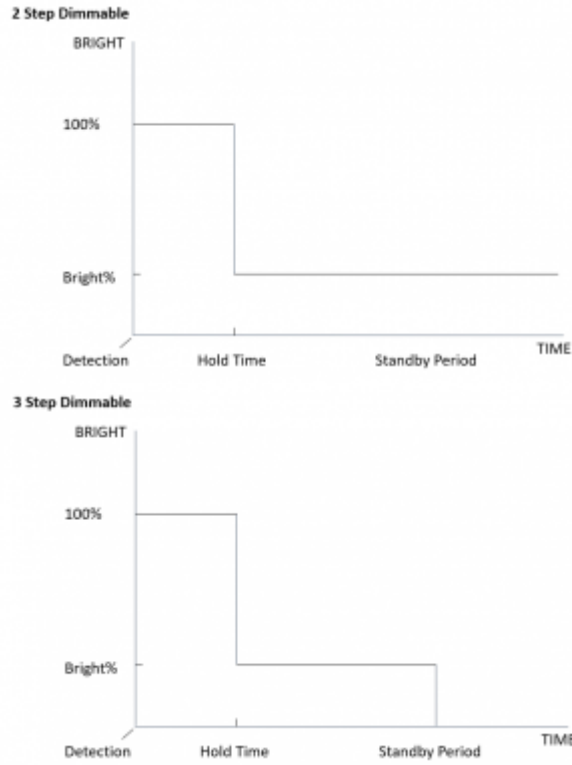

Related Products

CORF/2D1040, CORF/2D1040/MS, CORF/2D/BR



[www.codexled.co.uk](http://www.codexled.co.uk)

01223 393754

[info@codexled.co.uk](mailto:info@codexled.co.uk)

