


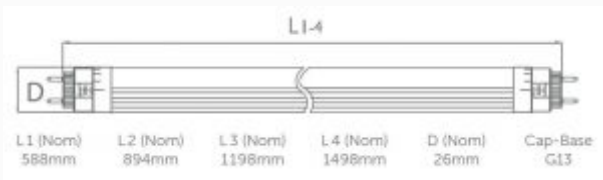

| Product Information   | Data  |
|-----------------------|---|
| Category              | Retrofit  |
| Name                  | T8 1200 Tube  |
| Codex Code            | CORF/T82050   |
| Legacy Code           | LO5C 1200mm, LO5G-H 1200mm  |
| Image                 |   |
| Features & Benefits   | <p>Exceptionally efficient LED tube<br/>           Best solution for traditional fluorescent T8 retrofit tube<br/>           Patented 180 degrees rotating end cap assists with fitting<br/>           Emergency and motion sensor options available<br/>           High tech optical design<br/>           Safe design single end power<br/>           Maximum efficacy and minimum glare<br/>           LED lifespan 50,000 hours</p> |
| At a glance           |   |
| IP Rating             | IP20  |
| Colour/ Finish        | White   |
| Mounting Method       | N/A   |
| Warranty (Years)      | 5   |
| <b>TECHNICAL DATA</b> |   |
| Wattage (W)           | 20  |
| Light Source          | 3528  |
| Number of LED's       | 216   |

| Product Information                     | Data   |
|---|--|
| Operating Lifespan (Hours)              | 50,000   |
| Colour Temperature CCT (K)              | 5000   |
| CRI                                     | >80  |
| Luminous Flux (Lm)                      | 2300   |
| Lumens/Watt (Lm/W)                      | 115  |
| Input Voltage/ Frequency                | AC100~277V 50/60Hz   |
| Class Protection                        | N/A  |
| Operating Temperature Range (degrees C) | minus 20 plus 40   |
| Dimensions                              |  <p>Technical drawing of a T8 LED tube showing dimensions: L1 (Nom) 588mm, L2 (Nom) 894mm, L3 (Nom) 1198mm, L4 (Nom) 1498mm, D (Nom) 26mm, and Cap-Base G13.</p> |
| Detail Dimensions                       | Length 1198 x Depth 26mm   |
| Motion Sensor                           | NO   |
| Motion Sensor Technical Data            | N/A  |
| Corridor Function                       | NO   |
| 3 Step Dimming                          | NO   |
| Lux Sensor                              | NO   |
| Photocell Advance                       | NO   |
| Adjustable Controls                     | NO   |
| Emergency                               | NO   |
| Replaceable Plug In Light Source        | N/A  |
| Replaceable Emergency Pack              | N/A  |
| Battery Warranty (years)                | N/A  |
| Other Options                           | Please contact us for further CCT options  |
| Related Products                        | N/A  |

01223 393754

[info@codexled.co.uk](mailto:info@codexled.co.uk)

